


# TABLE BASES



10" Top base

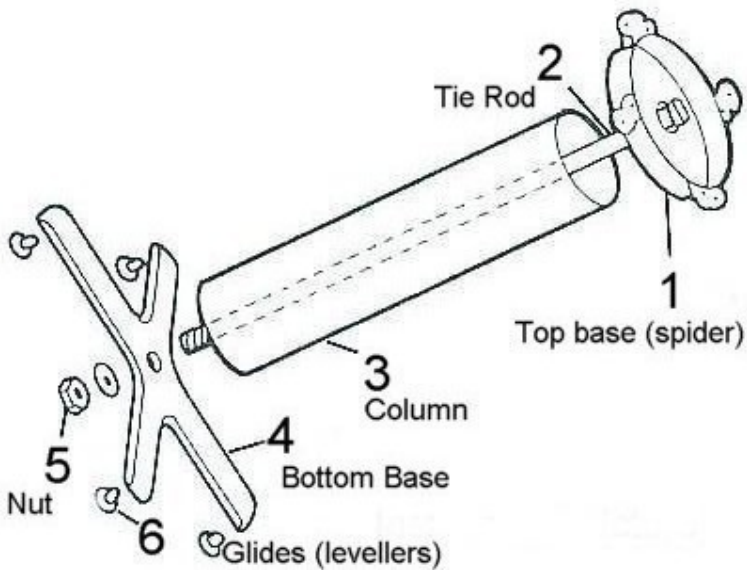

18" Top base

## Top base / Spider

For table bases under 30" - 10" Spider applies

For round table bases 30" and larger - 18" Spider applies

**Please consult the drawing above for proper installation**  
Apply tie rod through top base (spider) centre hole

2. Apply tie rod through the column

3. Place top base (spider) on hard surface with the column & tie rod in the upright position.

4. Apply tie rod through the centre hole of the bottom base

5. Apply the washers and the nut.

Center all the components and tighten securely.

6. Apply the glides (levellers).

- Bolt down table base does not require levellers  
Same Assembly instructions apply.

**To attach table top to the base please follow these guidelines**

Top base (Spider) specifications

Screw hole size 1/4"

Lip thickness 1/4"

For table top 1" thick

Suggested screw size 3/16" x 1" max length.

Use self threading wood screws.

For table tops 1" and thicker.

Suggested screw size 3/16" x 1" min

to a maximum screw length at 1/4" less than the thickness of the table top.

For more information contact Tony at:

[sales@stablebases.com](mailto:sales@stablebases.com) or Tel: 604.513.9286

<http://www.stablebases.com/>